



# RK95

series





CipherLab RK95 Industrial Mobile Computer, certified by Google's Android Enterprise Recommended (AER), is a powerful handheld terminal that steps up the data collection game in warehouse environments. The RK95 has been designed to simplify scanning operations and fulfill larger data collection. Equipped with multiple keypad options and a 4.3" multi-touch panel with versatile reader options, it meets the demands of traditional users' legacy warehouse applications and new indoor and outdoor applications.



## Superior Performance with Advanced Certified Mobile Computer Platform

The CipherLab RK95 is powered by an octa-core 2.2 GHz processor with 4 GB RAM/64GB Flash memory. Your staff can process the data in an instant without any interruptions. Furthermore, its Android 9.0 operating system is upgradeable to Android 12 operating system, from which you can get the security updates required to keep your CipherLab Android mobile devices secure while in use. The RK95's intuitive interface allows your staff to have less training and access the most up-to-date Android applications. It is also certified by Google's GMS and AER programs to ensure applications operate smoothly with elevated standards. Regular quarterly security updates are guaranteed for five years after its launch. Zero-touch enrollment with AER makes large scale Android deployment across multiple devices simple.



## Reliable Transmission Increases Workforce Productivity

The RK95's reliable transmissions include IEEE802.11 a/b/g/n/ac of dual band and 2x2 MIMO technology. With 2x2 MIMO, the RK95 offers superior Wi-Fi coverage and high-speed data throughput that keeps multiple workers connected simultaneously. With the ability to fast roaming in 1 seconds and reconnect in 7 seconds, the RK95 can handle big data transmission without disturbances. Workers can enjoy a more reliable wireless network regardless of location without interferences.

## Durable Designs that Outlast a Full Shift

The CipherLab RK95's IP65 rating, 1.8 m drop resistance and 1,000 tumbles at 1 m help support productivity with full protection from water, dust and accidental drops. Workers can feel secured when they work, knowing RK95's Corning Gorilla Glass improves damage resistance and toughness against chips and scratches. The keypad, with quality printing, also passed a durability test of 1 million presses. The RK95 can even extend its productivity into the cold storage or freezers and prevent device condensation. Along with all that durability, workers can operate for more than 8 working hours with the hot-swappable 3,000 mAh or 6,000 mAh battery, and more than 5 working hours with freezer battery.



## Accurate and Upgraded Features with Google Certification

With Google certification, the RK95 is a trusted enterprise mobile device that enhances workforce productivity and daily operations. Its powerful and upgradeable mobile computing platform operates with higher standards and security. With durable designs and resourceful data capture, the RK95 is surely a smart and cost-effective investment for your business.



## Resourceful Data Capture

CipherLab RK95's versatile reader options, laser, 2D imager, mid-range 2D imager and extended-range 2D imager, give you long distance barcode reading capabilities from 7.6 cm to over 21.4 meters. The RK95 has the same great modularity of the 9700 series for easy field replacement and on-site services. Additionally, it has the new LED indicator for good or bad scanning. Workers can also capture detailed photos for records of the cargo conditions and the verification process with its optional 13 MP camera. RK95's NFC ability, available on request, helps to read NFC smart tags or emulate contactless cards for access control.



## Easy Data Collection with Modernized Terminal Emulation and Physical Keypads

CipherLab RK95 provides a 38-key numeric and 52-key alphanumeric physical keypad option with CipherLab Terminal Emulation compatible with VT and TN systems. Additionally, the RK95's touch base operation can also support Android intuitive and interactive applications. Maximize simplicity with your choice of keypads or touch input for Terminal Emulation/Android Apps now or in the future. The RK95's 4.3-inch WVGA display also increases the readability and viewing area for your staff. It provides the best in-class indoor/outdoor readability and data input flexibility. Users can interact with the screen, regardless of the display is wet, with a finger, gloves or a stylus.

## Elaborate Utilities and Software Solutions



CipherLab's RK95 supports more than just 3<sup>rd</sup> party software. It also supports CipherLab self-developed software utilities to boost your operation.

- With CipherLab ReMoCloud®, certified by Google EMM (Enterprise Mobility Management), provides solution to manage CipherLab's Android devices via internet anytime and anyplace. Supported by Google Zero-touch enrollment, ReMoCloud® allows administrators to track, monitor and manage applications from a central administrated area.
- CipherLab Terminal Emulation supports systems of VT, TN3270 and TN5250 with full screen operation for efficient inventory management. With intuitive user interface, Wi-Fi status, battery capacity and custom font size/color, your business will undoubtedly save time and energy. Additionally, the Button Assignment which allows function key configuration will speed up the work process.
- CipherLab ADC (Android Device Configurator) makes customized configuration and project setting easy for administrators. These configuration utilities can perform system updates over USB connection or WMDS (Wireless Mobile Deployment System). Through BarcodeToSetting, you could even facilitate mobile settings by scanning 1D/2D barcodes.

# RK95 series

Visible LED indicators represent scanning result status, wireless connection, charging level and more.

4.3" touch display ensures readability and future adoption of touch-based applications.



28/38/50/52 keypad options. Terminal Emulation keypads support TN and VT systems.



IP65



Optional 13 MP camera embedded with specific angle to prevent it from being blocked by user's hand while gripping pistol or taking photos.

## Operation temperature down to -30°C



- Comes with temperature sensor and heater control software allows user to automatically turn on/off heater based on surrounding environment. For example, set to turn on heater under -10°C and turn off above 20°C.
- Heaters embedded in touch screen and scan window to ensure fog-free display and frost-free scanning.

# Android Operation Brings the Next Generation of Productivity and Efficiency




2x2 MU-MIMO technology with increased data capacity and transmission speed.

Versatile reader options of laser, 2D imager, mid-range 2D imager, and extended-range 2D imager fulfill different user demands in reading distance.




Maximum long distance barcode reading over 21 meters

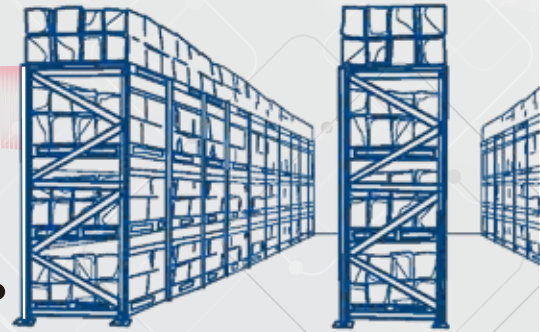

In-house curved shape makes it easy to grip.



Lightweight and pistol designs to guarantee all-day comfortability.



Two battery options with hot-swappable and easy-removable features allow one-hand operation.



Ice-resistant materials built into the product itself to prevent potential damage caused by prolonged operation in low temperature environments.

Freezer 5,500 mAh battery optimized for low temperature environment, min. 5 working hours at -30°C.



# RK95 series



Performance	Operating System	Android 9 / Android 12 (GMS and AER certified)
	CPU	Octa-core over 2.2 GHz
	Memory	64GB FLASH / 4GB RAM
	Expansion	Micro SD Slot With SDHC (up to 32 GB) and SDXC (up to 2TB) Support
	Operating Power	Standard: Rechargeable 3.7V, 3000 mAh / 6000 mAh Li-ion Battery Cold Storage: Rechargeable 3.7V, 5500 mAh Li-ion Battery
	Working Hours <sup>2</sup>	Standard: Min. 8 working hours (3000 mAh), Min. 12 working hours (6000 mAh) Cold Storage: Min. 5 working hours at -30°C
	Alert	LED indicators for RF, charging status, scanning status (2 circular LED at front and 2 rectangle LED at sides) / Vibrator / Speaker
Interface Supported		USB 2.0 with OTG
Wireless Communication	WLAN	IEEE 802.11 a / b / g / n / ac / e / d / h / i / r / k / v / w, IPv4, IPv6, 2x2 MU-MIMO
	WLAN security	WEP, WPA (PSK, TKIP), WPA2 (AES, PSK), WPA-1X (TKIP, EAP-TLS, PEAP), WPA2-1X (AES, EAP-TLS, PEAP), 802.1x (EAP-TLS, PEAP) AES-CCMP, WPI-SMS4, WPS2.0, WAPI, EAP-TTLS (PAP, MSCHAP, MSCHAPv2), PEAPv0-MSCHAPv2, PEAPv1-EAP-GTC and LEAP, EAP-PWD
	WPAN	Class 2 Bluetooth® v5.0 with BR / EDR and Low Energy (BLE) Support
	Bluetooth® profile	GAP, SDAP, HSP, SPP, GOEP, OPP, HFP, PAN, A2DP, AVRCP, GAVDP, HID, PBAP
Data Capture	Barcode Scanning	Standard: Laser / 2D Imager/ Mid-Range 2D Imager / Extended-Range 2D imager Cold Storage: 2D Imager/ Mid-Range 2D Imager / Extended-Range 2D imager
	Camera (Optional)	Autofocus 13 Megapixels with LED flash
	NFC <sup>1</sup>	Supports ISO14443A, ISO14443B, ISO15693, Felica (Peer-to-Peer, Card Reader, Card Emulation)
Physical Characteristics	Display	4.3" WVGA color display, Capacity Touch supports bare / wet / gloved finger and stylus inputs, Corning Gorilla Glass
	Interactive Sensor Technology	Light sensor, Proximity sensor, Motion sensor, E-compass, Gyroscope, Temperature sensor for Cold Storage
	Keypad	28-Key Numeric, 38-Key Numeric/Function keypads, 50-Key/52-Key Alphanumeric keypads, Terminal Emulation keypads (TN5250, TN3270 and VT) ,with LED backlight
	Voice and Audio	PTT voice ; Speaker, Microphones with noise reduction and echo cancellation, Bluetooth® headset
	Size (LxWxH)	216 mm x 80 mm x 30 mm
	Weight	Standard: 400 g (3000 mAh) / 445 g (6000 mAh), with 2D imager / 435 g (3000 mAh) / 480 g (6000 mAh), with Extended-Range 2D imager Cold Storage: 485 g, with 2D imager/ 520 g, with Extended-Range 2D imager
User Environment	Operating temperature	Standard: -20°C to 50°C / -4°F to 122°F Cold Storage: -30°C to 50°C / -22°F to 122°F
	Storage Temperature	-30°C to 70°C / -22°F to 158°F
	Humidity (Non-Condensed)	Operating 5% to 95% / Storage 5% to 95%
	Impact Resistance	Standard: 1.8 m / 2.4 m with Rubber Boot, multiple drops onto concrete (MIL-STD-810G), crossing operating temperature Cold Storage: 1.5 m multiple drops onto concrete (MIL-STD-810G), crossing operating temperature down to -30°C
	Electrostatic Discharge	± 15 kV Air Discharge, ± 8 kV Contact Discharge
	Regulatory Compliance	FCC / BC / CA65 / SRRC / CCC / NCC / BSMI / CE / WEEE / RoHS / REACH / Erp / BISWPC / IC / NRCAN / RCM (the regulatory compliance for WWAN model is available on request, NRE and MOQ may apply)
Development Support	CipherLab API and Android 9 / 12 Standard API	
Application Software	CipherLab: ReMoCloud®, Wireless Mobile Deployment System (WMDS), Android Device Configurator (ADC), BarcodeToSetting, AppLock, Button Assignment, Reader Configuration, Signature Capture, Airlock Browser, Mirror Terminal Emulation, Software Trigger ,OCR (Optional) Third Party: SOTI MobiControl, Xamarin Binding, iVanti Terminal Emulator & Browser, AirWatch, Kalipso	
Accessories	Snap-on Cable (USB), Pistol Grip, Rubber Boot, 4-slot Battery Charger, 5-slot Terminal Charging Cradle, 20-slot Battery Charger Multi-slot Charging Cradle with Battery Charger, Charging and Communication Cradle, Hand Strap, Belt Holster for Device with Pistol Grip, Please contact us for availability: 5-slot Terminal Ethernet Cradle <sup>1</sup> , Vehicle Cradle <sup>1</sup>	
Warranty	1 year	

1. Please contact us for availability.

2. Minimum 8 hours. 2D imager scanning per 20 seconds, LCD 50% backlight and speaker on (volume is default) at 25°C, Bluetooth® off / IEEE 802.11 a / b / g / n / ac on. The test is based on one broadcasting packet per second.

## ACCESSORIES



<b>Headquarters</b> CipherLab Co., Ltd.	12F, No. 333, Sec. 2, Dunhua S. Rd., Da'an Dist., Taipei City 106033, Taiwan Tel: +886 2 8647 1166 Fax: +886 2 8732 3300
<b>CipherLab China</b>	3115 Room, No.317 Xianxia Road, Changning District, Shanghai, China 200050 Tel: +86 21 3368 0288 Toll Free: +86 400 920 0285 Fax: +86 21 3368 0286
<b>CipherLab USA</b>	2552 Summit Ave. STE 400 Plano, Texas 75074, USA Tel: +1 469 241 9779 Toll Free: +1 888 300 9779 Fax: +1 469 241 0697
<b>CipherLab Europe</b>	Cahorslaan 24, 5627 BX Eindhoven, The Netherlands Tel: +31 (0) 40 2990202



This column contains the contact details of our channel partner. In case of any discrepancies in the brochure content, the information on the official CipherLab website shall prevail.